


Ground Rod Clamp, U-Bolt, Tinned, One Conductor



- Tinned finish provides a theft-deterrent appearance
- Accepts conductors in both parallel and perpendicular orientations

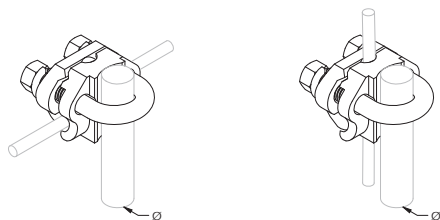

Material: Bronze, Stainless Steel 304 (EN 1.4301)

Finish: Tinned



Part Number	Ground Rod Diameter, Nominal	Conductor Size, UL
223GC064	5/8" – 3/4"	#4 Sol - 2/0 Str, 16 mm ² Str - 50 mm ² Str
223GC065	5/8" – 3/4"	2/0 Sol - 250 kcmil Str, 70 mm ² Str - 120 mm ² Str

Conductor Orientation (Parallel or Perpendicular)					
GC064	Conductor Size (Stranded)				
Nominal Ground Rod Diameter	16mm ²	25mm ²	35mm ²	50mm ²	70mm ²
5/8" copper-bonded ground rod	Par.	Par.	Par.	Perp.	Perp.
5/8" galvanized/stainless steel ground rod	Par.	Par.	-	Perp.	Perp.
3/4" copper-bonded ground rod	Par.	-	-	Perp.	Perp.
3/4" galvanized/stainless steel ground rod	-	-	-	Perp.	-
GC065	Conductor Size (Stranded)				
Nominal Ground Rod Diameter	16mm ²	25mm ² -70mm ²		95mm ²	120mm ²
5/8" copper-bonded ground rod	Par.	Both		Both	Par.
5/8" galvanized/stainless steel ground rod	Par.	Both		Both	Par.
3/4" copper-bonded ground rod	Par.	Both		Both	-
3/4" galvanized/stainless steel ground rod	Par.	Both		-	-

UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2019 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.