


Slotted Cable Duct



Information Sheet SD130213

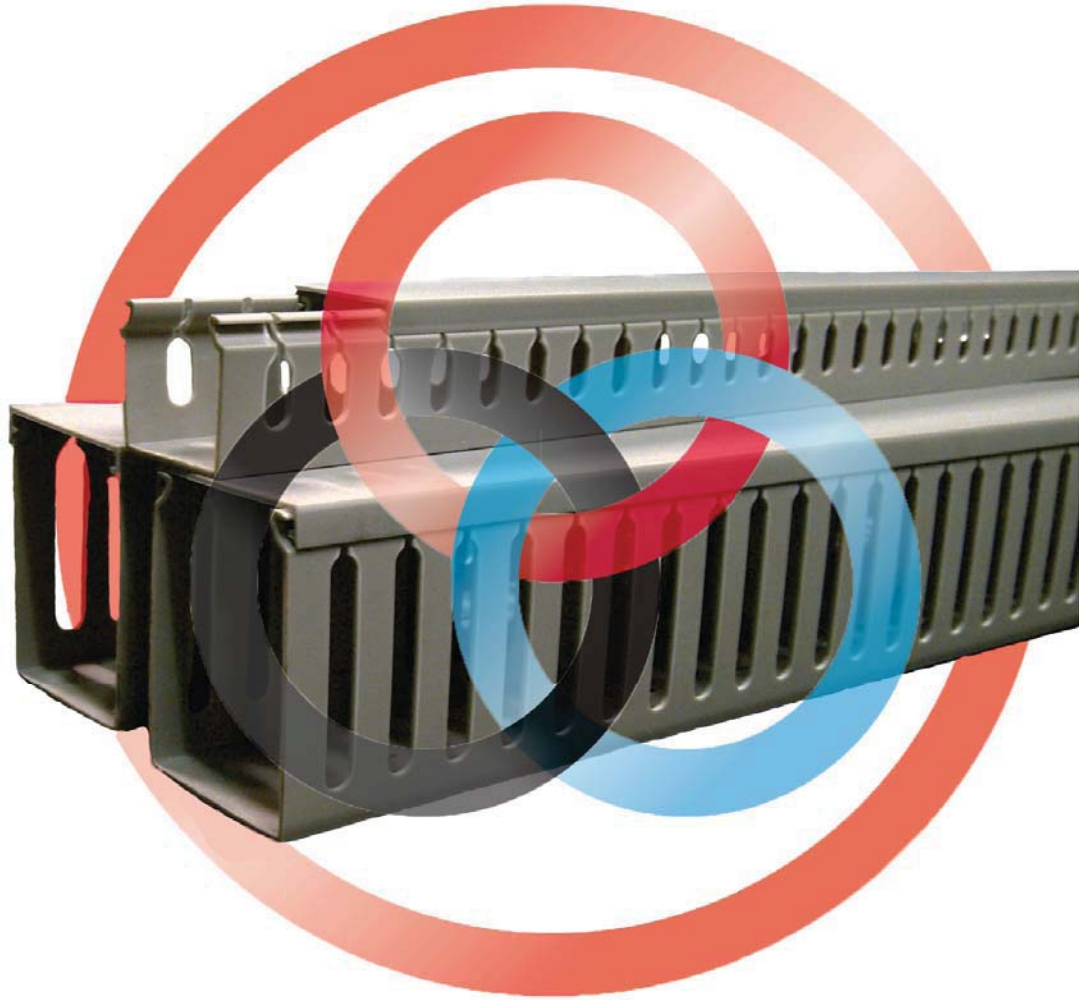

Noremak Slotted Cable Duct

Material:

High Impact, self extinguishing, warp proof PVC.

Colour:

Grey, Other colours available on request.




Service Temperature: 85 C

Self Extinguishing Standard: UL 94V-0

Test To UL Files: E97527 up to 50 C

Standard Length: 2.0 Mtr

Packing: To Order

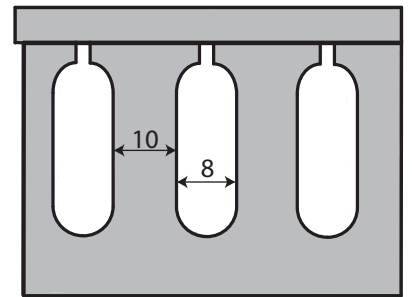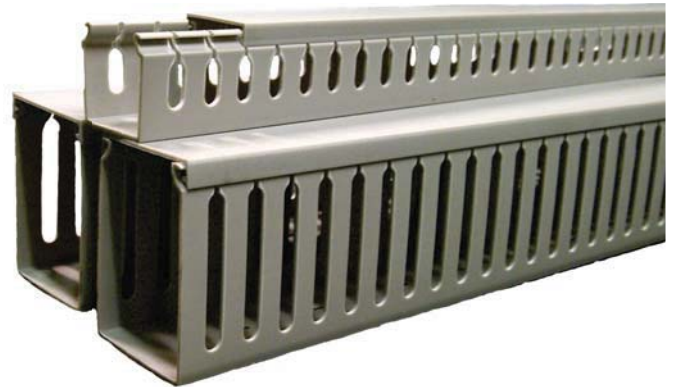

Part No	Slot mm	W x H mm	Approx Capacity 0.75-1.00 mm ²	Length mm
DS2530-2M	8.0	25 x 30	15-25 pcs	2000
DS2540-2M	8.0	25 x 40	20-25pcs	2000
DS2560-2M	8.0	25 x 60	40-45pcs	2000
DS2575-2M	8.0	25 x 75	95-100pcs	2000
DS2580-2M	8.0	25 x 80	100-120pcs	2000
DS4040-2M	8.0	40 x 40	60-70pcs	2000
DS4060-2M	8.0	40 x 60	100-115pcs	2000
DS4080-2M	8.0	40 x 80	120-135pcs	2000
DS6040-2M	8.0	60 x 40	100-115pcs	2000
DS6060-2M	8.0	60 x 60	120-135pcs	2000
DS6080-2M	8.0	60 x 80	180-210pcs	2000
DS8060-2M	8.0	80 x 60	180-210pcs	2000
DS8080-2M	8.0	80 x 80	240-290pcs	2000
DS10060-2M	8.0	100 x 60	240-290pcs	2000
DS10080-2M	8.0	100 x 80	260-350pcs	2000
DS100100-2M	8.0	100 x 100	300-400pcs	2000

Other sizes and styles available on request may be subject to moq